



THE
LOGICAL
OPTION
WHEN IT COMES TO
GYM FLOORING.


GYMlogix GYM FLOORING SPECIFICATIONS

PRODUCT STANDARDS AND RESULTS


Item	Standard	Rating for Rolls and Tiles
Tensile Strength	ASTM D412	266 PSI
Density	ASTM D3676	65lbs./cubic foot
Tear Resistance	ASTM D413	Average Elongation at break 1.55
Hardness	ASTM D2240	Shore A 65 +/-5
Compression Set	ASTM D395	-4.90%
VOC Emissions	ASTM D5116	0.5 mg/m2 or less
Flammability	ASTM D2859	PASS
Resistance to Chemicals	F-925-02	Resistant to most acids and chlorine
Coefficient to Friction	ASTM D1894/5	>0.8

GYM FLOORING DIMENSIONS-ROLLS

Width:	Standard — 4'	
Thickness:	Standard — 3mm - 12mm	
Length:	Standard — 25' & 50'	
Weight:	Thickness	Per sq ft
	1/4"	1.25 lb
	8mm	1.65 lb
	3/8"	2 lb
	1/2"	2.5 lb
	3/4"	4 lb



Premium gym flooring available in rolls, tiles or mats. Can be interlocking or straight cut. Available in black, 10% color. Additional color percentage requires special ordering.

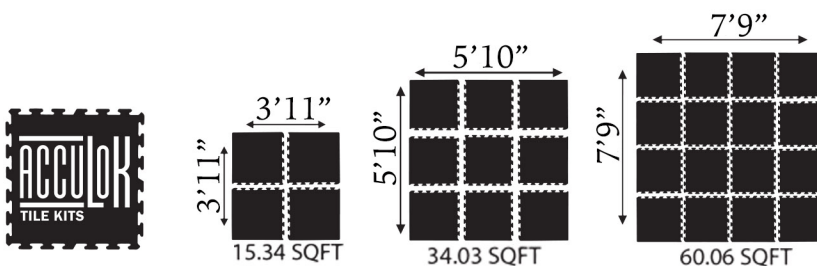

RUBBERlogix color products are mixed to a set of guidelines put into place in our mixing line. However, we cannot control color shade changes in our EPDM supply. We strive to keep our color lines the same but cannot guarantee color across different batches.

